



CLEARMIRROR®


THE DIFFERENCE IS CLEAR

20"X36" BODYSHAVE CLEARMIRROR

16105-203624M

**SPECIFICATIONS**

- Tolerance: ± 0.0625"
- Mirror must mount flush with tile or surround.
- UL Listed for use in showers.
- Transformer located in remote/accessible area.
- Electrical: 24Volt/85Watt.

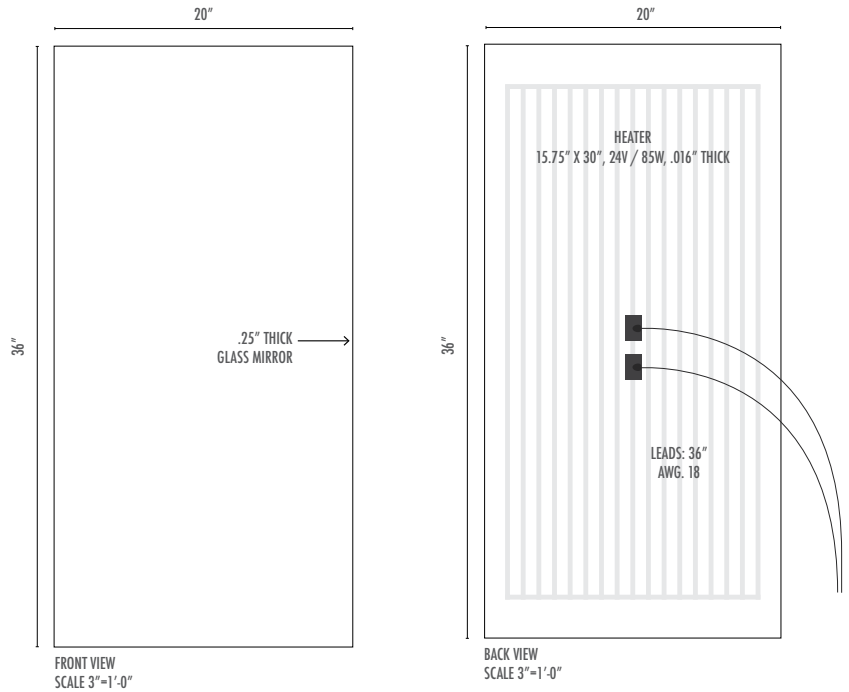

**JUSTIN 101-24 CLASS 2 POWER SUPPLY**

- Input voltage: 120VA 60HZ
- Rate current: 4100mA
- Output voltage: AC 24V
- Manual Reset Overload Protection
- Mounting Brackets
- 1/2" input nipple located for direct "J" box entry
- UL Listed Class 2 Transformer File E12056 (meets or exceeds the requirements set forth in Underwriters Laboratories Standard for safety (UL5085))

